




Zaozhuang Yiding Bearing Co., Ltd.

KOYO HK2212 needle roller bearings

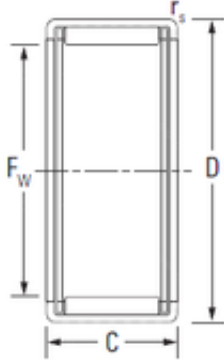

HK2212 Bearing 2D drawings and 3D CAD models

Bearing No. HK2212

Size	22x28x12 mm
Bore Diameter	22 mm
Outer Diameter	28 mm
Width	12 mm
Fw	22 mm
D	28 mm
C	12 mm
r5 min.	1 mm
Weight	0.015 Kg
Basic dynamic load rating (C)	9.81 kN
Basic static load rating (C0)	14.50 kN
(Grease) Lubrication Speed	9600 r/min
Category	Needle Non Thrust Roller Bearings
Inventory	0.0
Manufacturer Name	KOYO
Minimum Buy Quantity	N/A
Weight / Kilogram	0.016
Product Group	B04144
Rolling Element	Needle Roller Bearing
Component	Roller Assembly with Outer Ring - No Inner Ring
Enclosure	Open
Self Aligning	No
Retainer	Yes
Number of Rows of Rollers	Single Row



Zaozhuang Yiding Bearing Co., Ltd.

Separable	No
Closed End	No
Inch - Metric	Metric
Relubricatable	No
Thrust Bearing	No
Long Description	22MM Bore; 28MM Outside Diameter; 12MM Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; No Separable; N
Other Features	2 Rib Outer Ring Drawn Cup Bearing Steel Cage
Category	Needle Non Thrust Roller Bearing
UNSPSC	31171512
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Needle
Manufacturer URL	http://www.koyousa.com
Manufacturer Item Number	HK2212
Weight / LBS	0.033
Bore	0.866 Inch 22 Millimeter
Outside Diameter	1.102 Inch 28 Millimeter
Width	0.472 Inch 12 Millimeter
Bearing No.	HK2212
C3(min)	\
rs(min)	1
Cr	9.81
C0r	14.50
Cu	2.20
Grease lub.	9600



Zaozhuang Yiding Bearing Co., Ltd.

Oil lub.	15000
(Refer.) Mass(kg)	0.015
Mounting inner ring	JR17x22x13